


Barrier Transparent

12PSC

Data Sheet (December 2005)

Product description

Nuroll 12 PSC is a bi-axially oriented polyester (BOPET) film with one side coated with a PVdC copolymer water latex designed for printing with inks for PVdC and lamination. The coating is heat sealable and has an excellent moisture, oxygen and aroma barrier.

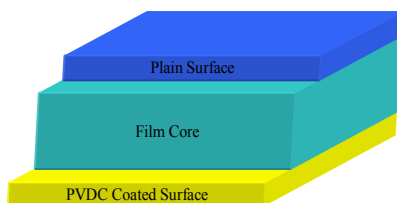

PSC film offers a good resistance to heat and humidity also during pasteurization

Main Applications

Barrier transparent flexible packages for: meat, biscuits, coffee, snacks, dairy products, olives, car freshness, wet towels, etc.

Recommendations

12 PSC film must be preserved from the light exposition. We suggest to keep reels protected by UV barrier PE as supplied by Nuroll

Barrier Transparent

12PSC

Technical details

Nuroll PSC is usually supplied with following characteristics:

- **Core diameter:** 6 inches (152.76 mm)
- **Film width:** min 400 mm, max 1960mm
- **Film length:** 12000 m, 24000m
- **Packing presentation:** suspended reel; UV barrier PE; wooden endboards, lid and pallet; stretchable PE film

Different characteristics than the above on request

Storage conditions

Nuroll 12PSC need to be stocked in a close warehouse and preserved from the light and from the humidity.

Reels must be not stacked

Nuroll will not guarantee and accept any responsibility for material older than 1 year from the delivering

Compliance with regulations

Polyester Film produced by Nuroll SpA, complies with EEC, Italian and FDA requirements on packaging for direct contact with foodstuffs

Barrier Transparent

12PSC

Typical Properties

| Properties | Unit | Test Method | Typical values |
|---------------------------------|------------------------|----------------|----------------|
| Thickness | Microns | ASTM E 252 | 13,5 |
| Coating grammar | g/m ² | ASTM E 252 | 2 |
| Area Yield | m ² /kg | ASTM E 252 | 52 |
| Tensile strength | MD | ASTM D 882 | 220 |
| | TD | | 250 |
| Elongation at Break | MD | ASTM D 882 | 130 |
| | TD | | 110 |
| Thermal Shrinkage 150°C -30' | MD | ASTM 1204 | 1,3 |
| | TD | | 0,8 |
| Haze | % | ASTM D1003 | 5 |
| MVTR (38°C, 90%RH) | g/m ² *day | ASTM E398 | 6 |
| OTR (20°C, 0%RH) | cc/m ² *day | ASTM D3985 | 6 |
| Welding force | N/15 mm | 130°C-1"- 1atm | 1 |

1. This information is the best currently available on product and it is subject to revision as additional knowledge and experience is gained.
2. The results obtained and the above properties refer to average value of laboratory tests. Therefore, such results have only to be considered as an indicative general guide to material properties and not as an implied guarantee that the product actually has said properties and/or a warranty of fitness for a particular purposes and/or suggestion for infringement of any existing patents.
3. Due to many factors which may affect customer production process, including but not limited by different equipments and techniques used, PSC film must be qualified before being used in any application.