

Peelable-C

PPHC-PHAC

Data Sheet (December 2005)

Product family Introduction

Nuroll Peelable-C is a bi-axially oriented polyester film, one side with an amorphous polyester heat seal layer, one side chemically treated to improve inks and/or adhesives adhesion.



It is specially designed for heat sealable lidding application in packaging refrigerated and frozen foods. Nuroll Peelable-C shows also an excellent hot-tack for hot filling process.

Nuroll Peelable-C film can be placed at temperature down to -60°C and up to 200°C with only limited distortion of the base film, for this reason the film is dual ovenable, pasteurizable and provides strong, consistent peeling to substrates such as APET, CPET, PETG and PVC in all the usual conditions

The heat seal layer is available in 2 different thickness, 2 (**PPLC** grade) and 3,5 (**PPHC** grade) microns. Nuroll Peelable-C is commercially available also with **anti-fogging** characteristics to assure more clarity and transparency when stored in refrigerators

Sealing properties

Nu Roll Peelable-C film shows a very good seal immediately after the sealing (hot tack properties), for this reason represents the right choice for hot filling and MAP packaging applications. Its particular formulation guarantees a good seal without stress the shredding behavior.

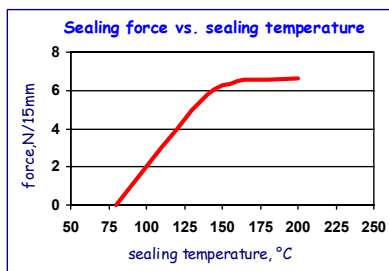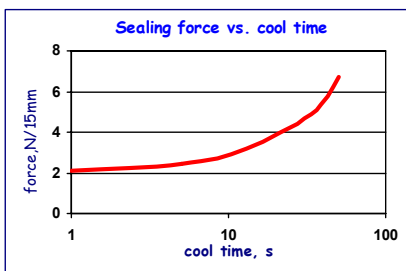

Welding force of 23 PPHC on different substrates

Welding conditions	Film/Film	Film/Film at 0°C	Film/ CPET (APET layer)	Film/ Cardboard	Film/ Cardboard at 0°C	Film/ 23µ Film plain
140°C-4bar-1sec	> 6,5	5	5,5	2,5	2,5	2,5
140°C-4bar-2sec	> 6,5	5,5	6,5	3,5	2,5	2,5
140°C-4bar-4sec	> 6,5	5,5	7,5	3,5	2,5	2,5
160°C-4bar-1sec	> 7	6,5	7	3	3	3
160°C-4bar-2sec	> 7	6,5	7,5	3	3	3
160°C-4bar-4sec	> 7	6,5	7,5	4	3	3
190°C-4bar-1sec	> 7	> 7	7	3,5	3,5	4
190°C-4bar-2sec	> 7	> 7	8	4	3,5	4
190°C-4bar-4sec	> 7	> 7	8	4	3,5	4

Specimen structure	N/15 mm
Film/Film	> 6,5
Film/ 50µ Film plain	5
Film/ Cardboard	3,5
Film/ APET	7,5
Film/ 100% CPET	5
Film/ Aluminium 64µ	3,5 - 4

FORCE is measured by INSTRON dynamometer in N Sample dimension is 15 mm width

Cardboard is laminated with BOPET film, cardboard polyester extrusion coated behaviour is like CPET


Peelable-C

PPHC-PHAC

Product description

Nuroll PPHC is suggested when besides strong sealability (due to tray complex design or filling process that can dirty the sealing area by powder, fats or liquids) it is requested enhanced printability or laminate adhesion.

Nuroll PPHC is commercially available also with anti-fogging characteristics (PHAC) to assure more clarity and transparency when stored in refrigerators

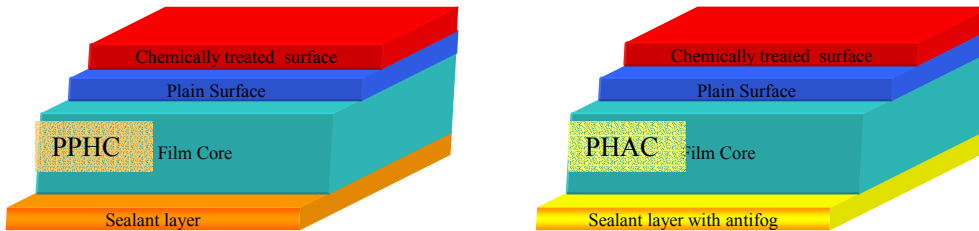

Main Applications

Food containing fats, liquids, powder; food packaging for pasteurization; food packaging for hot fill process; food packaging for MAP process

Technical details

Nuroll PPHC is usually supplied with following characteristics:

- **Core diameter:** 6 inches (152.76 mm)
- **Film width:** min 400 mm, max 1400mm
- **Film length:** According with film thickness and max external reel diameter 640mm

Substrate Thickness (microns)	12	23
Max Reel lenght (m)	12000	8000

- **Packing presentation** suspended reel; wooden endboards, lid and pallet; stretchable PE film

Different characteristics than the above on request

Storage conditions

Nuroll PPHC need to be stocked in a close warehouse and preserved from the light and from the humidity.

Reels must be not stacked

Nuroll will not accept any responsibility for material older than 1 year from the delivering

Compliance with regulations

Polyester Film produced by Nuroll SpA, complies with EEC, Italian and FDA requirements on packaging for direct contact with foodstuffs

Peelable-C

PPHC-PHAC

Typical Properties

Properties		Unit	Test Method	Typical properties PPHC grade		Typical properties PHAC grade	
Film base Thickness		Microns	ASTM E 252	12	23	12	23
Coating weight		g/m ²	ASTM D1505	3,5	3,5	3,5	3,5
Total thickness		Microns	ASTM E 252	15,5	26,5	15,5	26,5
Area Yield (nominal)		m ² /kg	ASTM E 252	49	28	49	28
Tensile strength	MD	N/mm ²	ASTM D 882	230	230	230	230
	TD			240	240	240	240
Elongation at Break	MD	%	ASTM D 882	130	130	130	130
	TD			120	120	120	120
Thermal Shrinkage 150°C-30'	MD	%	ASTM 1204	2	2	2	2
	TD			0,5	0,5	0,5	0,5
Haze		%	ASTM D1003	8	8	8	8
MVTR (38°C, 90%RH)		g/m ² *day	ASTM E398	50	25	50	25
OTR (20°C, 0%RH)		cc/m ² *day	ASTM D3985	110	50	110	50
Welding force (on itself) 140°C—4 bar—4 s		N/15mm	Internal	breaking	breaking	breaking	6,5

1. This information is the best currently available on product and it is subject to revision as additional knowledge and experience is gained.
2. The results obtained and the above properties refer to average value of laboratory tests. Therefore, such results have only to be considered as an indicative general guide to material properties and not as an implied guarantee that the product actually has said properties and/or a warranty of fitness for a particular purposes and/or suggestion for infringement of any existing patents.
3. Due to many factors which may affect customer production process, including but not limited by different equipments and techniques used, PPHC-PHAC film must be qualified before being used in any application.